

ANDLY


Product Catalogue

Steam Trap - Bucket Type STX2 Series



ANDLY 株式会社
ANDLY Co., Ltd.

STX2-PT Screwed Type Steam Trap

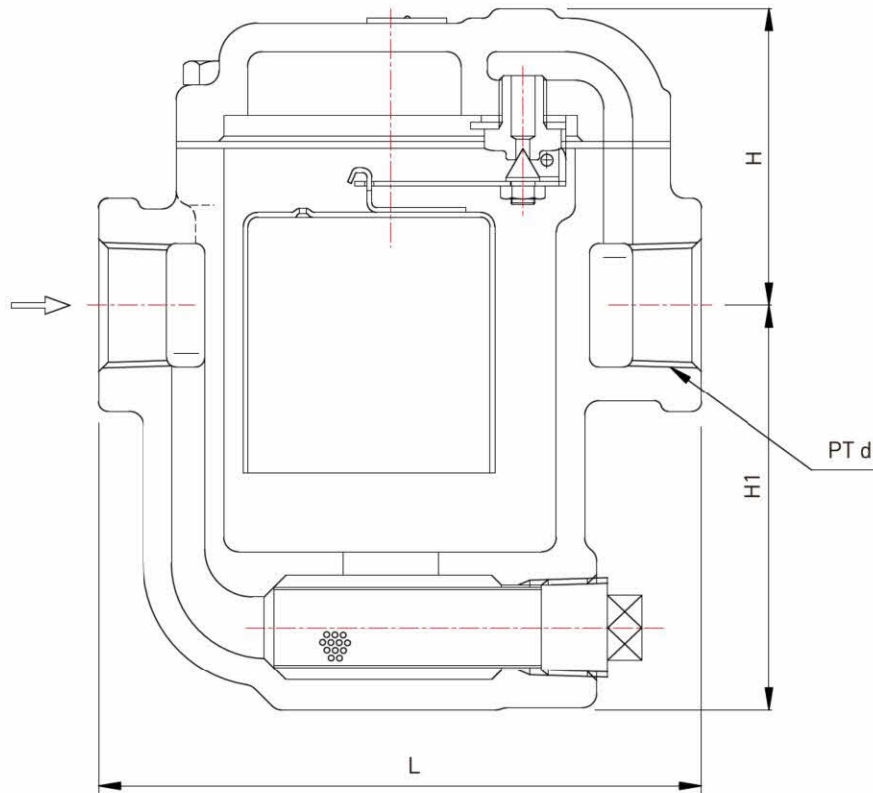

STX2-PT SPECIFICATION


Working Pressure (kgf/cm ²)	0.35 ~ 8.16	
Working Temperature	MAX. 220°C	
Working Fluid	Steam	
Connection	PT Screwed	
Material	Body	Ductile Cast Iron
	Trim	Stainless Steel

STX2-PT DIMENSION

(Unit:mm)

SIZE	L	H	H1	PT d
15A	127	70	88	PT 1/2"
20A	127	70	88	PT 3/4"
25A	137	77	94	PT 1"

STX2-JIS10K Flanged Type Steam Trap

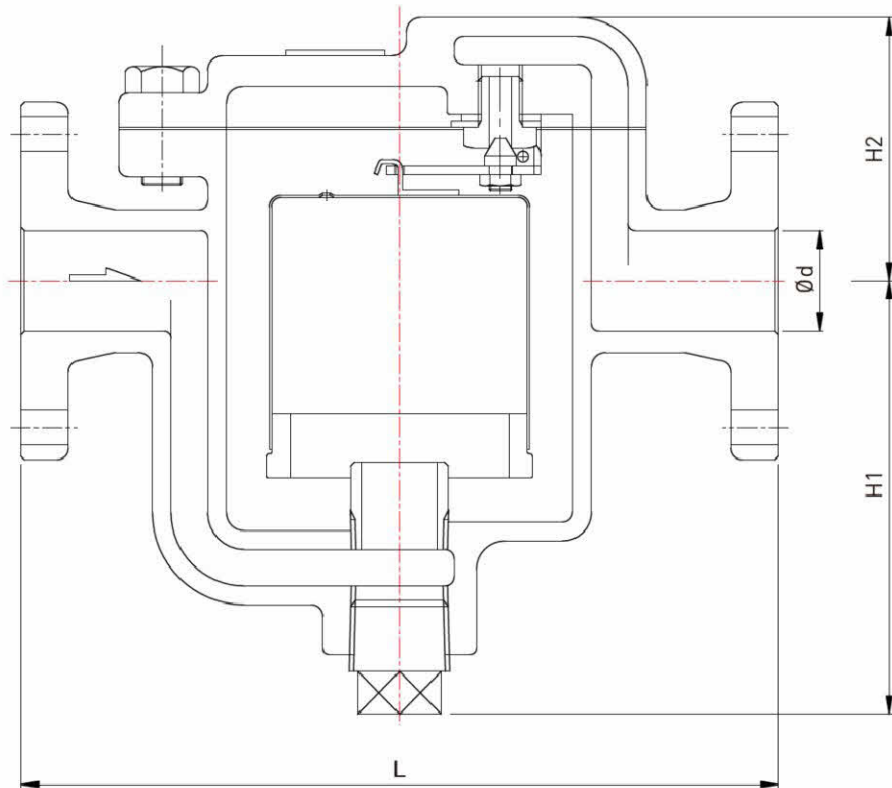

STX2-JIS10K SPECIFICATION

Working Pressure (kgf/cm ²)	0.35 ~ 8.16	
Working Temperature	MAX. 220°C	
Working Fluid	Steam	
Connection	JIS 10K Flanged	
Material	Body	Ductile Cast Iron
	Trim	Stainless Steel

STX2-JIS10K DIMENSION

(Unit:mm)

SIZE	d	L	H1	H2	FLANGE
32A	32	250	190	90	JIS B 2210
40A	40	250	190	90	10K FF
50A	50	290	200	100	

承同創興

ANDLY

ANDLY Co., Ltd.

4-3-37,TATSUMI-HIGASHI,IKUNO-KU,
OSAKA-CITY,OSAKA,544-0014 JAPAN

URL: www.andly.jp

TEL: +81-06-7509-4724

